




COMBAT TWIN

Unità secondaria

Monitor Rugged panel

PC 15"

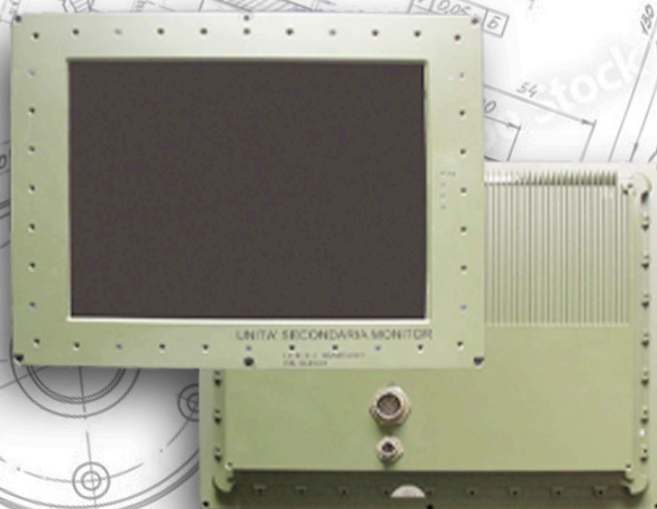



COMBAT TWIN

Unità secondaria Monitor Rugged panel PC 15"



- 15" Industrial Grade High Resolution TFT-LCD Panel
- LED Backlight with higher performance and reliability in harsh environments
- Hard Coated Impact Protection for LCD Panel
- Sealed design
- Anticorrosive Housing designed to withstand Shock and Vibration
- I/O Military connectors
- IP66 graded
- Thought to be use with LEM "COMBAT TWIN—Unità primaria CPU"
- Provided with six fixing holes M5 for panel mounting

Model Unità secondaria Monitor 15"

TFT Specification

Resolution:	15" 1024 x 768
Backlight:	LED

Mechanical and Environment

Dimension:	411 x 323 x 77 mm
Weight:	3.7 Kg ± 500 g
Operation Temp.:	-32°C to +50°C
IP Proof:	IP66
Fixing hole:	6 x M5
High Temperature:	MIL-STD-810G M.501
Low Temperature:	MIL-STD-810G M.502
Temperature Shock:	MIL-STD-810G M.503
Solar Radiation:	MIL-STD-810G M.505
Rain:	MIL-STD-810G M.506
Salt Fog:	MIL-STD-810G M.509
Sand and Dust:	MIL-STD-810G M.510
Vibration:	MIL-STD-810G M.514
Shock:	MIL-STD-810G M.516
Acid Atmosphere:	MIL-STD-810G M.518

I/O Connectors


Port:	1 x VGA in
-------	------------

User Control

LED Indicator:	Power ON
----------------	----------

Power Specification

Power Input:	18 — 32 Vdc
--------------	-------------

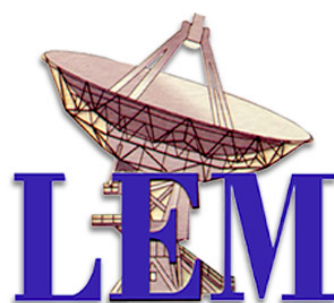

Stabilimento: 00071 Pomezia (Rm) - Via dei Castelli Romani, 24

Tel. 003969105503- Fax 003969105504

Mail lemsrl@lemsrl.it – P.E.C. lemsrl@arubapec.it